



INFRARED FLASH CURE F-SERIES

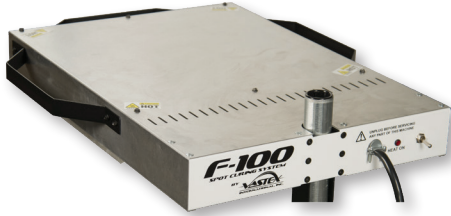

F-100
16" x 16" Heater
On/off power switch
Includes levelers

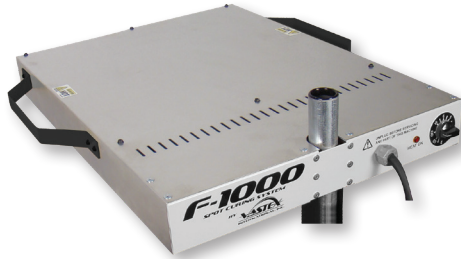

F-1000
18" x 18" Heater
Heat control
Includes wheels


High wattage and close coil density heater, for greater heater surface consistency.

Great heaters along with our built in heat shields allows Vastex flashes to be set closer to your garment, which increases efficiency and productivity.



**15 YEAR
HEATER WARRANTY**

F-1000
Shown with standard stand

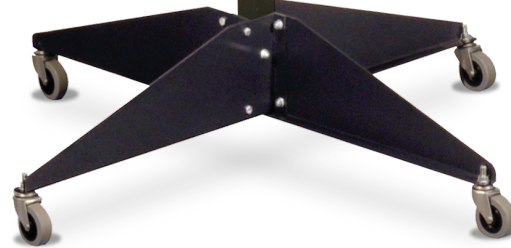

CE CERTIFIED
BY CERTIFICATION EXPERTS
THE NETHERLANDS

F-100

16" x 16" (41 x 41 cm)
1,625w @ 120v or 240v
NEMA 5-15P or 6-15P

Heater Size
Power (Wattage)
Power Plug

F-1000

18" x 18" (46 x 46 cm)
1,950w @ 120v or 2,600w @ 240v
NEMA 5-20P or 6-15P

F-100

15 Year Heater Warranty
1,625 Watt IR Heater
On/off power switch
Heavy duty side handles
Head leveler to adjust the heater parallel to the pallet
Heat shields for even heater temperature

Features

RELIABLE
POWERFUL
USER FRIENDLY
CONVENIENT
UNIQUE
SMART


F-1000

15 Year Heater Warranty
1,950 or 2,600 Watt IR Heater
Heat control with power lights
Heavy duty side handles and locking wheels
Head leveler to adjust the heater parallel to the pallet
Heat shields for even heater temperature


Options



Super Heavy
Duty Stand

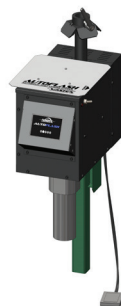

AutoFlash



Rotary Table

** Domestic plugs listed. International cords available.













Flash Cure Units

Technical Specifications

CE	F-100	F-1000	REDFLASH		AIR-FLASH	
Models	F-100	F-1000	R-18-240	R-1824-240	RA-18-HO	RA-1824
Heater Warranty	15 Year	15 Year	15 Year	15 Year	15 Year	15 Year
Bumper to Bumper Warranty	3 Year	3 Year	3 Year	3 Year	3 Year	3 Year
Heater Size	16" x 16" (41 x 41 cm)	18" x 18" (46 x 46 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)
Unit Warm Up Time	15 min. (120V) or 10 min. (240V)	20 min. (120V) or 10 min (240V)	6 min.	12 min.	6-10 min	6-10 min
Heater Wattage	1625 Watt Heater	1950 or 2600 Watt Heater	2600 or 3500 Watt Heater	3500 Watt Heater	3500 Watt Heater	4300 Watt Heater
Electrical Specs* / included plug (Some models require a dedicated line. 50/60 HZ for all units.)	120V/13A/1625W NEMA 5-15P 240V/6.5A/1625W NEMA 6-15-P	120V/15.6/1950W NEMA 5-20P 240V/11/2600W NEMA 6-15-P	240V/11A/2600W NEMA 6-15P 240V/16A/3500W NEMA 6-20P	240V/16A/3500W/ NEMA 6-20P Plug	240V/16A/2500W NEMA 6-20P	240V/19A/4300W/ NEMA L6-30P
Electrical Specs - AutoFlash / included plug	110-125V/1A/NEMA 5-15P 220-240V/1A/NEMA 6-15P					

Shipping Weights and Dimensions

	Weight**	Dimensions**
F-100 (Head and Stand)	39 lbs (18 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
F-1000 (Head and Stand)	42 lbs (19 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
R-18-240 (Head Only)	35 lbs (16 kg)	26" x 29" x 7" (66 x 74 x 18 cm)
R-1824-240 (Head Only)	43 lbs (19.5 kg)	26" x 35" x 8" (66 x 90 x 20 cm)
RA-18-HO (Head Only)	64 lbs (29 kg)	29" x 26" x 15" (74 x 66 x 38 cm)
RA-1824 (Head Only)	74 lbs (35.5 kg)	35" x 29" x 15" (89 x 74 x 38 cm)
AF-120/AF-240 AutoFlash kit	51 lbs (25 kg)	31" x 22" x 14" (79 x 56 x 36 cm)
SH-STAND-WS Standard Stand for Manual Flash	22 lbs (10 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND-M Heavy Duty Stand for Manual Flash	42 lbs (19kg)	30" x 14" x 7" (76 x 35.5 x 18 cm)
SH-LEGS-AF Standard Stand for AutoFlash	15 lbs (7 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND Heavy Duty Stand for AutoFlash	39 lbs (18 kg)	30" x 15" x 11" (76 x 38 x 28 cm)

NORTH AMERICAN POWER PLUG CONFIGURATION		
RECEPTACLE		PLUG
	120V	
NEMA 5-15R		NEMA 5-15P
	240V	
NEMA 5-20R		NEMA 5-20P
	240V	
NEMA 6-15R		NEMA 6-15P
	240V	
NEMA 6-20R		NEMA 6-20P
		
NEMA 6-30LR		NEMA 6-30LP

*If extension cord is required, consult a licensed electrician.

**All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications.

1 in = 2.54 cm
1 lb = 0.454 kg

